


# THE STRIKER™

by WESTERN TECHNOLOGY



Long-Handle Striker™

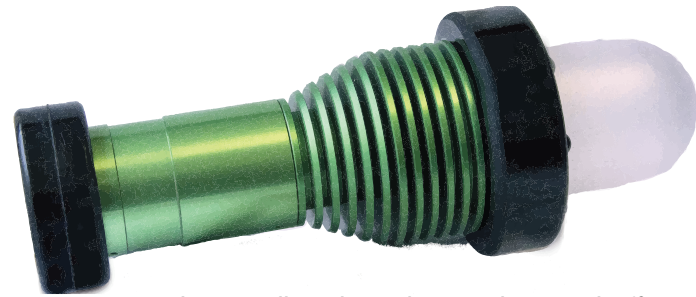

Short-Handle Striker™ Shown with Optional Diffuser

- Weight:
  - >3 lbs (lighthouse only)
  - 20 lbs (lighthouse and 100' cable)
- Approved for Hazardous Locations:
  - Class I, Div. 1 & 2, Groups C & D;
  - Class II, Div. 1 & 2; Groups E, F, & G;
  - CSA Zones 1, & 2; Zones 20, 21, & 22
- Approved for Wet Location Usage
- Temperature Rating: T5 (-40C to +40C)/T4 (-40C to +100C)
- LED Color: ~ 6000°K, CRI >70, >1,750 Lumens
- Standard Optic: 50° refractive, Optional: 30°, 45°, or 60° reflective
- Light Head Power: 21VDC (8100-3A)
- Bumper Protection with Secondary Lens Options: Blast Lens, Safety & Anti-Glare Shields, Filters & Diffusers
- Dimensions: 8100-3A (8.2"L x 3"D), 8100-3B (13.5"L x 3"D)



**Western  
Technology**

Proudly Made in America - World-Class Engineering

**Western Technology, Inc.**  
3517 Arsenal Way  
Bremerton, WA 98312

Toll-Free: 800.654.5483  
Phone: 360.917.0080  
Fax: 360.917.0083

[WesternTechnologyLights.com](http://WesternTechnologyLights.com)