




SBC 782



Slam Shut
Valves

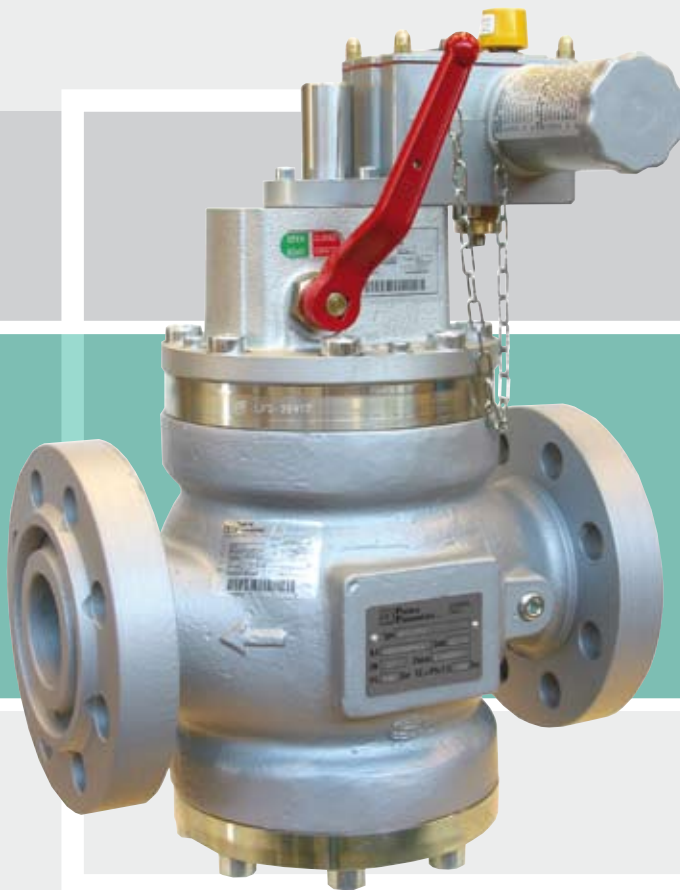


SBC 782



> Slam shut valves

Introduction

SBC 782 is a compact safety device (SAV) which quickly intercepts gas flow whenever the pressure under monitoring reaches pre-set limits, or whenever manually required by operator on site or through a remote command (optional device).

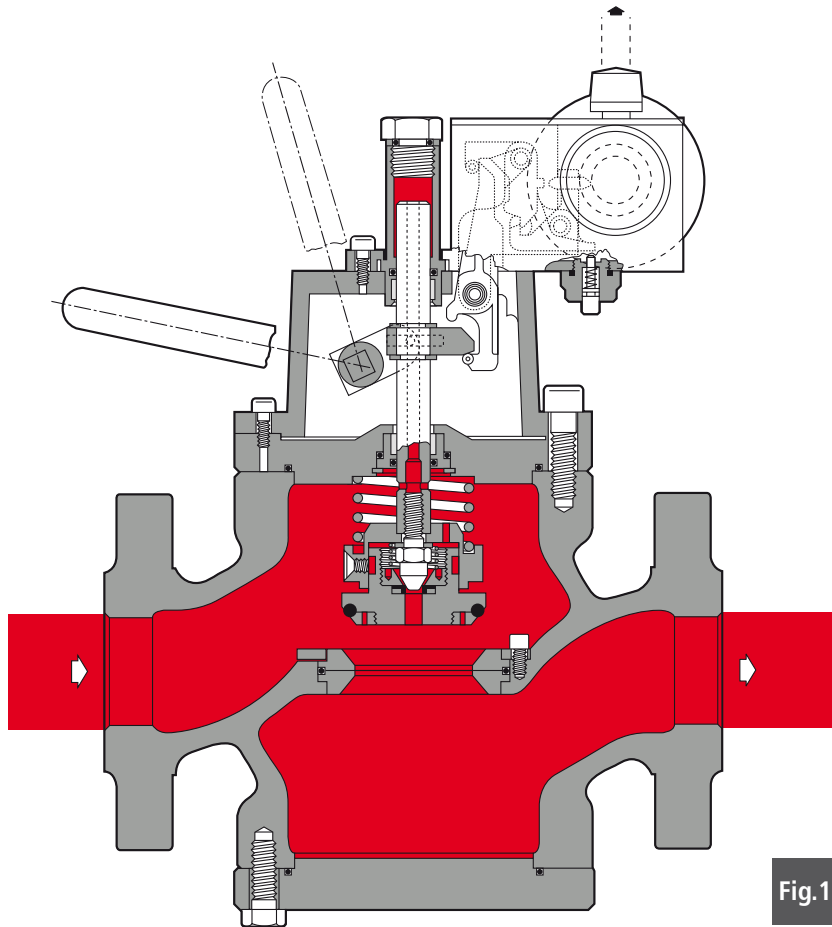

SBC 782

Fig. 1

Main Features

SBC 782 is a slam-shut valve with self operated actuation and manual resetting. It is an ideal product for distribution, transmission networks, industrial and chemical engineering applications. **SBC 782** is suitable for natural gas and all non-corrosive gaseous media. Its "top entry" design allows an easy maintenance without removing the body from the pipeline.

Main features:

- Intervention for overpressure and/or underpressure;
- Manual push-button control at installation point;
- 3 way solenoid valve for remote control (available on request);
- Manual re-setting;
- Internal by-pass for pressure equalization before resetting
- Possibility of application of devices for remote signal information (contact switches or proximity switches);



SBC 782

Designed
With Your
Needs In Mind

- Compact Design
- Easy Maintenance
- Top Entry
- Fast Response Time
- High Accuracy
- Low Operation Cost
- Third Party Certified Safety Device
- Integral By-Pass



Main Features

- Design pressure: 18,9 bar (274 psi) for class 150
51,7 bar (749,6 psi) for class 300 (up to size 4" only)
102 bar (1479 psi) for class 600 (up to size 4" only)
- Design temperature: -20 °C to +60 °C (-14 to + 140 ∞F)
- Ambient temperature: -20 °C to + 60 °C (-4 to + 140 ∞F)
- Range of intervention for overpressure Who: 0,02 to 88 bar (8" w.c. to 1276 psi)
- Range of intervention for underpressure Whu: 0,01 to 88 bar (4" w.c. to 1276 psi)
(depending on installed pressure controller)
- Accuracy class AG: ± 5%
- Available size: class 150 DN 1" - 2" - 2" ^{1/2} - 3" - 4" - 6" - 8" - 10
class 300 & 600 DN 1" - 2" - 3" - 4"
- Flanging: class ANSI 150 - ANSI 300 - ANSI 600 RF or RTJ according to ANSI16.5 and PN16 according to ISO 7005

Materials

| | |
|-----------------------------|--|
| Body | Cast steel ASTM A352 LCC for class 300 and 600 ASTM A216 WBC for class 150 and PN16 |
| Valve seat | Steel + rubber |
| Steam | AISI 416 Stainless steel |
| Plug | AISI 416 Stainless steel |
| Diaphragm | Ruberized canvas |
| Seals | Nitril rubber |
| Disengagement device | Housing in light alloy, with stainless steel mechanism |
| Compression fitting | According to DIN 2353 in zinc-plated carbon steel |

The characteristics listed above are referred to standard products. Special characteristics and materials for specific applications may be supplied upon request.



SBC 782

Calculation of the pressure drop

The following formula can be used to calculate pressure losses of the slam shut valve in fully open position:

$$\Delta p = \frac{K_G \times P_u - \sqrt{(K_G^2 \times P_u^2) - 4Q^2}}{2 \times K_G}$$

Δp = pressure loss in bar

P_u = absolute inlet pressure in bar

Q = flow rate inlet Stm^3/h

K_G = flow coefficient

Pressure loss calculated as above is referred to natural gas with specific gravity of 0.61 (air=1) temperature of 15 °C at valve inlet, for gases with different specific gravity S and temperatures t °C, pressure loss can still be calculated with the above formula, replacing the value of the flow coefficient in the table with:

$$K_{G1} = K_G \times \sqrt{\frac{175.8}{S \times (273.16 + t)}}$$

Table 1: K_G valve coefficient

| | | | | | | | | |
|-------------------------------------|-----|------|-------------------|------|------|-------|-------|-------|
| Nominal diameter (mm) | 25 | 50 | 65 | 80 | 100 | 150 | 200 | 250 |
| Size (inches) | 1" | 2" | 2" ^{1/2} | 3" | 4" | 6" | 8" | 10" |
| K_G coefficient | 510 | 1970 | 3550 | 4390 | 7120 | 14780 | 23080 | 32506 |

SBC 782



> Slam shut valves

Table 2 lists the correction factors Fc for a number of gases at 15 °C.

Table 2: Correction factors Fc

| Type of gas | Relative density | Fc Factor |
|----------------|------------------|-----------|
| Air | 1.0 | 0.78 |
| Propane | 1.53 | 0.63 |
| Butane | 2.0 | 0.55 |
| Nitrogen | 0.97 | 0.79 |
| Oxygen | 1.14 | 0.73 |
| Carbon dioxide | 1.52 | 0.63 |

Caution:

in order to get optimal performance, to avoid premature erosion phenomena and limit noise emissions, it is recommended to check that the gas speed at the outlet flange does not exceed 50 m/sec.

The gas speed at the outlet flange may be calculated by means of the following formula:

$$V = 345.92 \times \frac{Q}{DN^2} \times \frac{1 - 0.002 \times Pd}{1 + Pd}$$

where:

V = gas speed in m/sec

Q = gas flow rate in Stm³/h

DN = nominal size of regulator in mm

Pd = outlet pressure in barg.

Table 3: Pressure switches

| Type | 101 | 102 | 103 | 104 | 105 | 106 | 107 | 108 | 109 |
|------------------------------------|-------------|-------------|------------|----------|-----------|----------|---------|----------|----------|
| Overpressure range (OPSO). | 0,02 to 1 | 0,2 to 5 | 2 to 22 | 15 to 44 | 30 to 88 | 0,2 to 5 | 2 to 22 | 15 to 44 | 30 to 88 |
| Underpressure range (UPSO). | 0,01 to 0,3 | 0,04 to 0,7 | 0,2 to 3.5 | 1,6 to 8 | 3,2 to 16 | 0,1 to 5 | 1 to 22 | 7 to 44 | 14 to 88 |
| Press. in bar | | | | | | | | | |

Installation

To ensure proper operation and declared performance, the followings should be observed when installing the **SBC782** slam shut valves:

- filtering: the gas flowing in the piping must be adequately filtered. It is also recommended that the piping upstream the regulator is clean and avoids impurities;
- sensing line: for correct operation, the sensing line nipple must be appropriately positioned. Between the valve and the downstream take-off there must be a length of straight pipe \geq four times the diameter of the outlet pipe; beyond the take-off, there must be a further length of pipe \geq twice the same diameter.

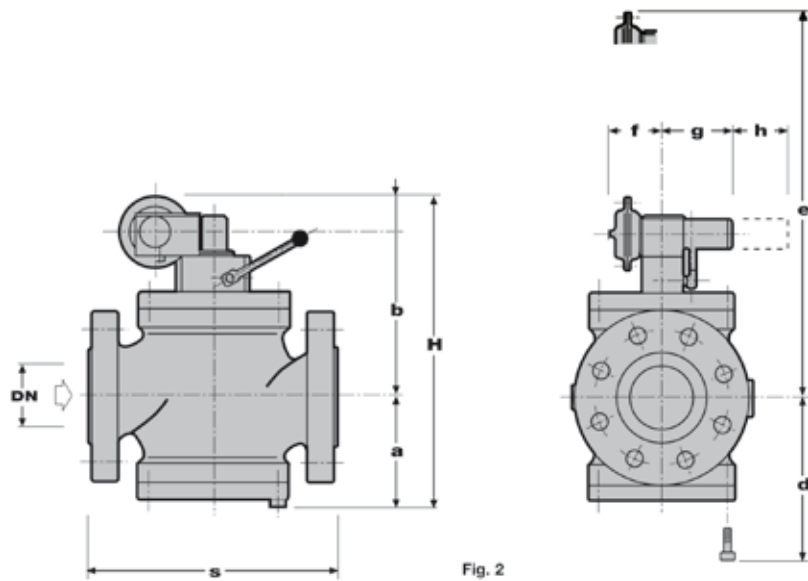


Fig. 2

Overall dimensions in mm

| Size (mm) | 25 | 50 | 65 | 80 | 100 | 150 | 200 | 250 |
|--------------------|------|------|--------|------|------|------|------|------|
| Inches | 1" | 2" | 2 1/2" | 3" | 4" | 6" | 8" | 10" |
| S - Ansi 150/PN 16 | 183 | 254 | 277 | 298 | 352 | 451 | 543 | 673 |
| S - Ansi 300 | 197 | 267 | - | 317 | 368 | - | - | - |
| S - Ansi 600 | 210 | 286 | - | 336 | 394 | - | - | - |
| a | 100 | 130 | 140 | 150 | 190 | 225 | 265 | 340 |
| b | 215 | 240 | 270 | 315 | 300 | 375 | 450 | 530 |
| d | 130 | 160 | 180 | 200 | 250 | 275 | 320 | 440 |
| e | 280 | 330 | 380 | 425 | 440 | 560 | 625 | 730 |
| f | 75,5 | 75,5 | 75,5 | 75,5 | 75,5 | 75,5 | 75,5 | 75,5 |
| g | 118 | 118 | 118 | 118 | 118 | 118 | 118 | 118 |
| h | 80 | 80 | 80 | 80 | 80 | 80 | 80 | 80 |
| H | 315 | 370 | 420 | 465 | 490 | 600 | 715 | 870 |

Weights in Kgf

| | | | | | | | | |
|---------------|----|----|----|----|----|-----|-----|-----|
| ANSI 150/PN16 | 21 | 37 | 45 | 51 | 79 | 154 | 255 | 430 |
| ANSI 300 | 22 | 40 | - | 54 | - | - | - | - |
| ANSI 600 | 23 | 42 | - | 57 | - | - | - | - |

Face to face dimensions S according to IEC 534-3 and EN 334



Pietro Fiorentini S.p.A.
via E.Fermi 8/10
I-36057 Arcugnano (VI)
Italy

via Rosellini 1
I-20124 Milano
Italy

Tel. +39 0444 968.511
Fax. +39 0444 960.468

Tel. +39 02 696.14.21
Fax. +39 02 688.04.57

www.fiorentini.com

The data are not binding. We reserve the right to make eventual changes without prior notice.

CT-s512-E July 2008